


KOTELYZER[®] 150AUTO

High-power model for industrial use, self ignition.
Hotblow function is available and apply to field works.

■ Model : 82A ■ Name : Kotelyzer 150AUTO (self ignition)

Standard Parts

Part No.	Illustration	Description
72-01-02		Soldering Tip
72-02		Protective Cap
70-35		Spanner
80-40		Hexagon Wrench
72-01-52		Hotblow Tip
72-01-55		Heat Shrink (S)

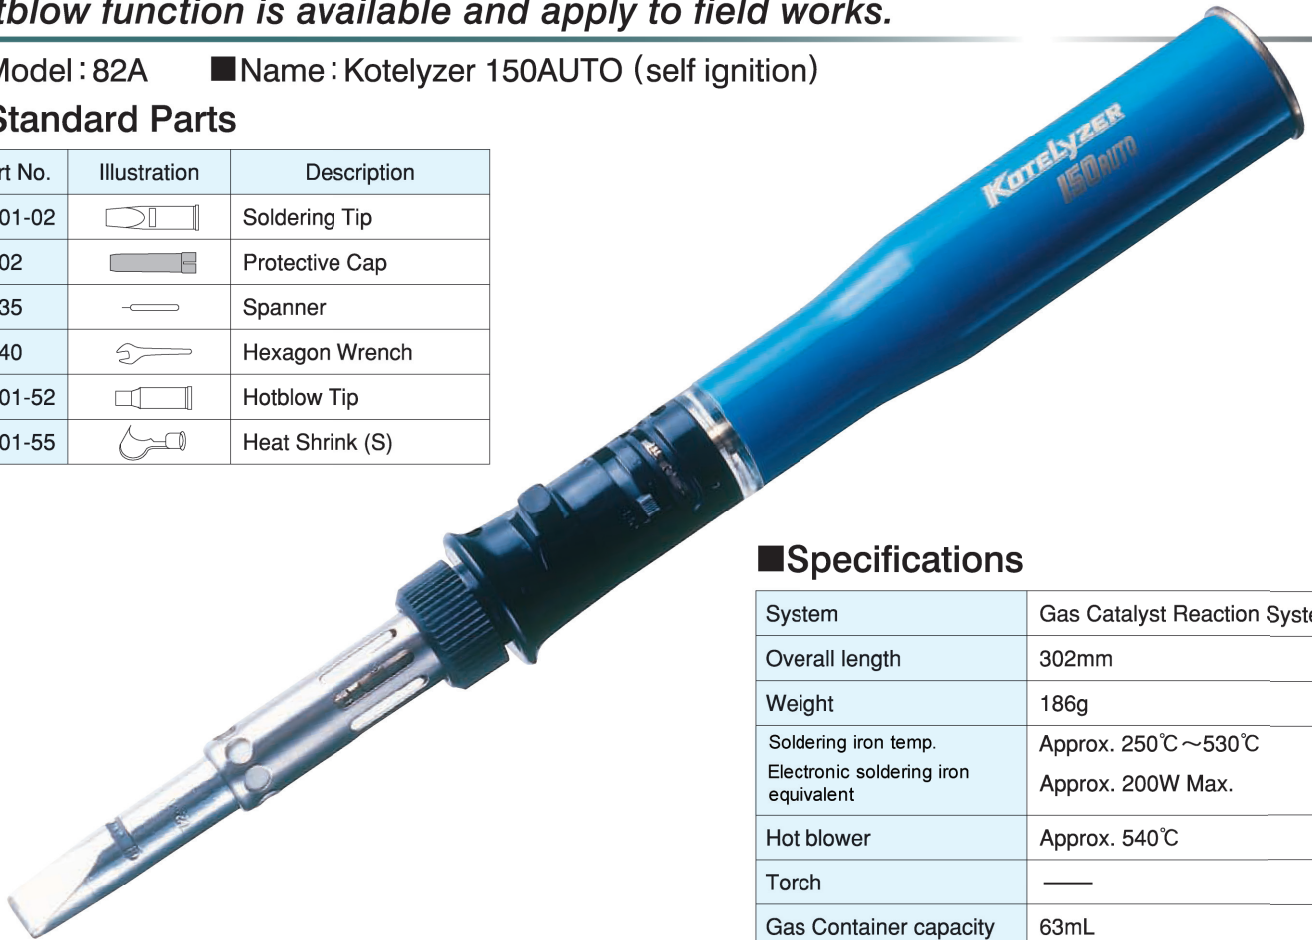


Specifications

System	Gas Catalyst Reaction System
Overall length	302mm
Weight	186g
Soldering iron temp. Electronic soldering iron equivalent	Approx. 250°C ~530°C Approx. 200W Max.
Hot blower	Approx. 540°C
Torch	—
Gas Container capacity	63mL
Operation time/ one gas filling	Approx. 150min.

Soldering iron function



Hot blower function


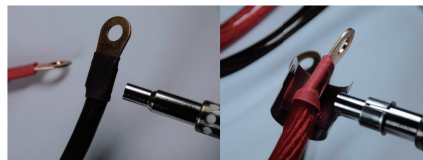


Optional Parts

Soldering Tip (Pb free)

 ● 72-01-01 φ3 20	 ● 72-01-02 W 10 20 T	 ● 72-01-03 φ4 20 45° T	 ● 72-01-05 φ1.5 20 T	 ● 72-01-06 φ4 20 45° T
 ● 72-01-07 φ1.5 20 T	 ● 72-01-11 W 7 25 T	 ● 72-01-12 W 4 20 T	 ● 72-01-13 φ12.5 20 45° T	 ● 72-01-14 M5-P0.8

Hotblow Tip



Heat Shrink

- 72-01-54 (L) W=32
- 72-01-55 (S) W=27



Tip Housing

- 72-14



Carrying String

- 72-52U



Protective Cap

- 72-02



Ejector Unit

- 82-07U



Knurled Nut

- 72-14

